



TRASCINATORI DRIVERS

TRASCINATORI IN CM / Morse Taper Drivers

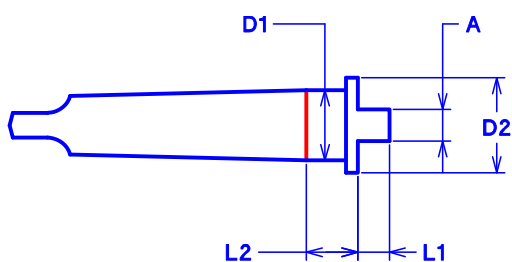

Codice Code	D1=Cono Morse Morse Taper	D2	A	L1	L2
415101-008	1	24	8	8	11,5
415102-008	2	24	8	8	13
415103-008	3	24	8	8	8
415104-008	4	24	8	8	7,5
415105-008	5	24	8	8	7,5
415102-012	2	34	12	10	13
415103-012	3	34	12	10	13
415104-012	4	34	12	10	14,5
415105-012	5	34	12	10	7,5


TRASCINATORI IN CONO DIN 238 / DIN 238 Taper Drivers

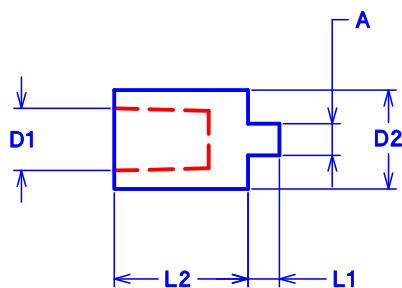

Codice Code	D1=Cono DIN 238 DIN 238 Taper	D2	A	L1	L2
415210-008	B 10	24	8	8	26
415212-008	B 12	24	8	8	31
415216-008	B 16	25	8	8	34
415218-008	B 18	29	8	8	45
415224-008	B 24	34,5	8	8	65
415218-012	B 18	29,5	12	10	45
415224-012	B 24	38	12	10	65


**TRASCINATORI
DRIVERS**

TRASCINATORI PER MANDRINI A PINZA / Drivers for Collet Spindle

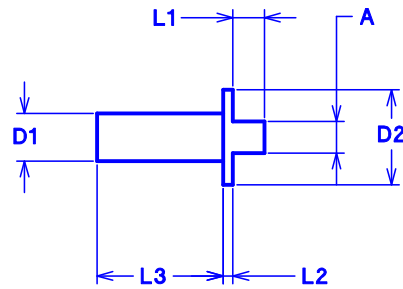

Codice Code	D1	D2	A	L1	L2	L3
415410-008	10	24	8	8	2,5	25
415412-008	12	24	8	8	2,5	32

TRASCINATORI PER MANDRINI DIN 55058 / Drivers for DIN 55058 Spindle

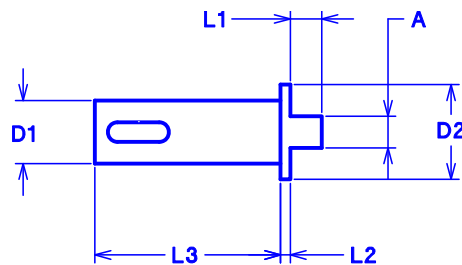

Codice Code	D1	D2	A	L1	L2	L3
405312-008	12	24	8	8	2,5	35,5
405316-008	16	24	8	8	2,5	47
405320-008	20	24	8	8	2,5	47
405328-008	28	32	8	8	4	52
405336-008	36	39,5	8	8	4	59
405316-012	16	24	12	10	2,5	47
405320-012	20	29	12	10	2,5	47
405328-012	28	34	12	10	4	52
405336-012	36	39,5	12	10	4	59